

N-type TOPCon



144 Half-Cut TOPCon Cell
Bifacial Dual Glass

Model No: FST-M10.144G-XXX
(where XXX = 570 - 600)

-  Higher Efficiency
-  Bifacility Factor : 80 ± 10 %
-  Lower Degradation
-  Outstanding Power Generation
-  PID Free/Low LID Protection
-  Lower Temperature Coefficient
-  Less Hot Spot Shading Effects
-  Exceptional Mechanical Resistance



23.23% Maximum Efficiency	600 Wp Maximum Power Output
0~+4.99 W Positive Power Tolerance	GRADE A Cells Guaranteed

Certifications



BIS | IEC 61730 | IEC 61215 | UL 61730 | IEC 61701 (salt mist) | IEC 62716 (Ammonia)
IEC 61853-1 & 2 (PAN File) | LeTID | IEC 60068 (sand & dust) | IEC 62804 (PID) | CEC

For more details, please contact:


FS Green Energies Pvt. Ltd.

Corporate Office:
Samanvay House, Beside Urmi Society,
Nr. Alkapuri Haveli, Jetalpur Road,
Alkapuri, Vadodara - 390 007, Gujarat.

Manufacturing Unit:
Survey No 160, Karjan Sadhli Road,
Juni Jithardi Village, Karjan - 391 240
Gujarat.

LINEAR PERFORMANCE WARRANTY

1st Year Degradation ≤ 1%
2-30th Year Degradation ≤ 0.4% p.a.

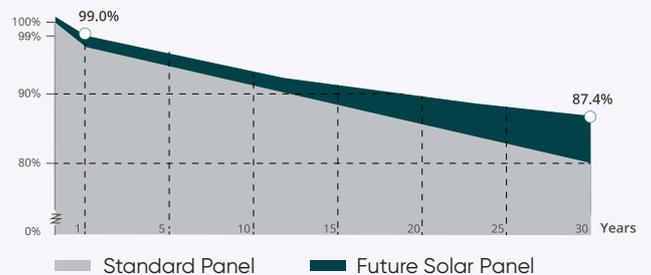

Standard Panel Future Solar Panel



